


# → SYSTEM-KIT 90000.0002.7544



## No Transport of persons and goods in dynamic operation

Lifting load max.	10 kN
Stroke length max. (*)	2.100 mm
Lifting speed appr.	660 mm/min.
Engine group (DIN 15020)	1Cm at load collective L3
Useful life (**)	400 h at T1 ( $\leq 0,25$ h daiyl)
Operating standard	DIN EN ISO 14122 + MRL (CE)
Ambient temperature	5°C to +40°C
Protection class	IP 55
Performance Level	(PL)c
Supply voltage	230V 1~ / 50Hz

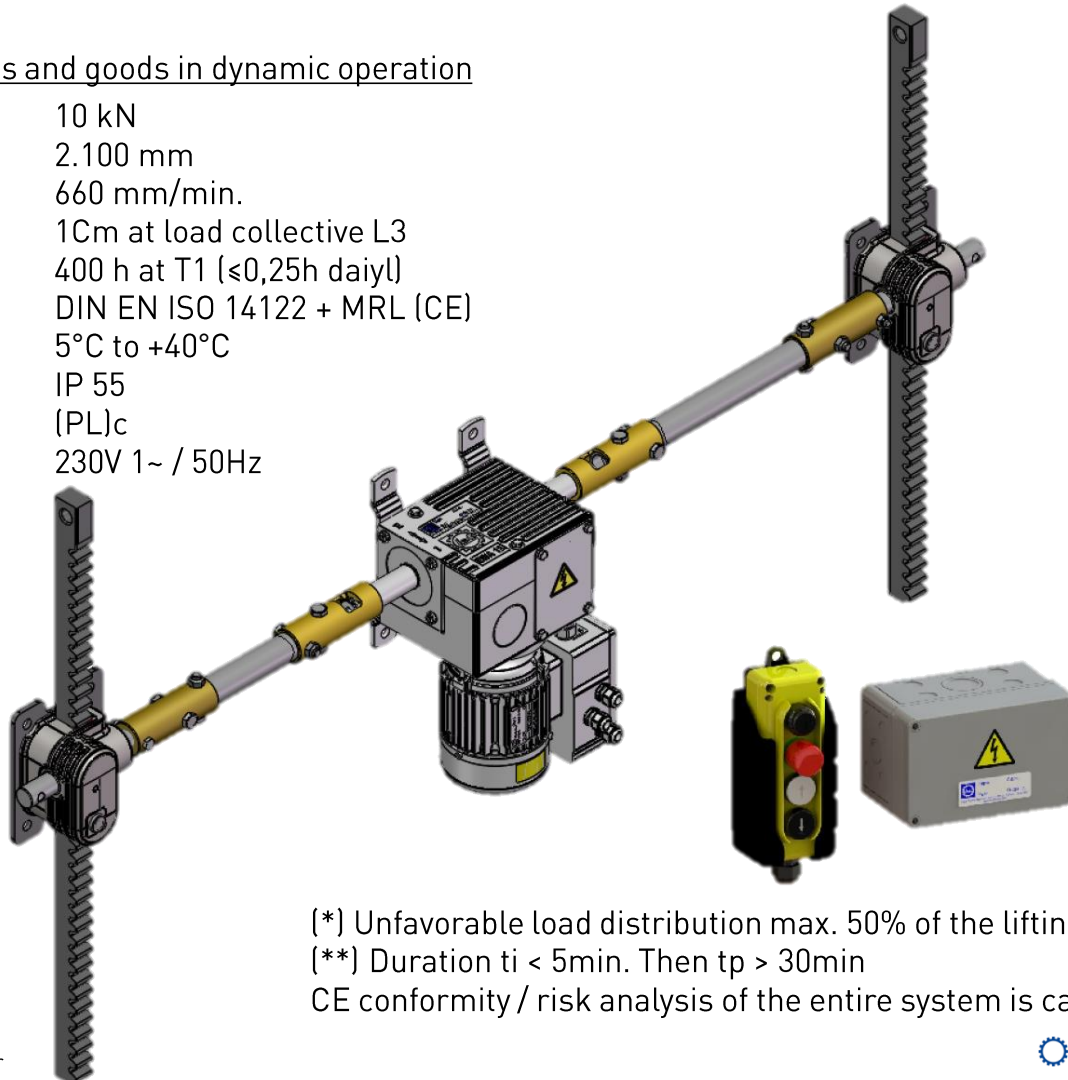

No transport of persons  
In dynamic mode

Connecting shaft  
provided by the customer

(\*) Unfavorable load distribution max. 50% of the lifting load each rack  
(\*\*) Duration  $t_i < 5$ min. Then  $t_p > 30$ min  
CE conformity / risk analysis of the entire system is carried out by the customer