

→ SYSTEM-KIT 90000.0002.7548




Transport of persons and goods in dynamic operation

Lifting load max.	6 kN
Stroke length max. (*)	1.700 mm
Lifting speed appr.	1.300 mm/min.
Engine group (DIN 15020)	1Cm at load collective L3
Useful life (**)	400 h at T1 (≤0,25h daiyl)
Operating standard	DIN EN 1570-1 / DIN EN 280+ MRL (CE)
Ambient temperature drive	-5°C to +40°C optional down to -15°C
/ Control box	-25°C up to +40°C
Protection class	IP 55
Performance Level	(PL)c
Supply voltage	230V 1~ / 50Hz
Shaft speed (gear output)	120 U/min.



Transport of persons
In dynamic mode

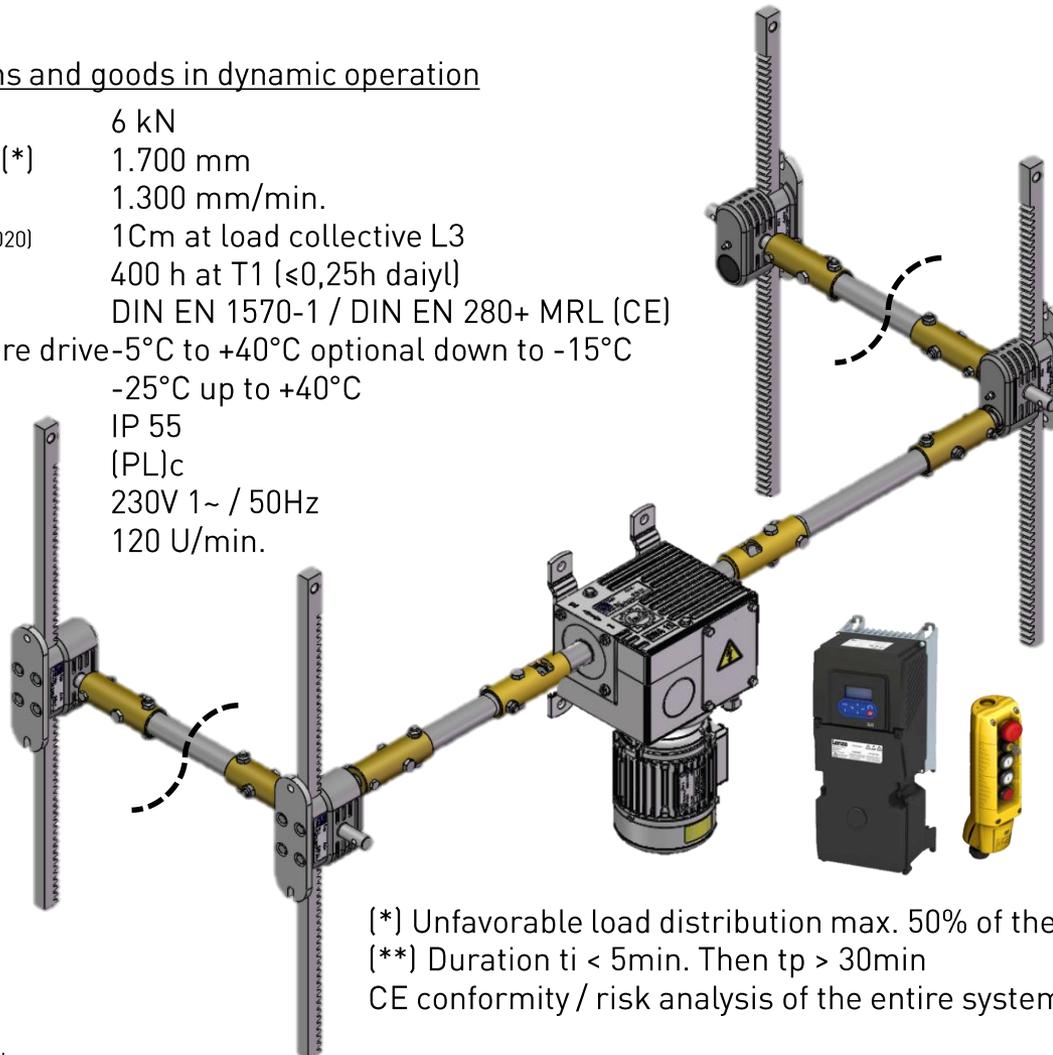

 = Erweiterung
Connecting shaft
provided by the customer

(*) Unfavorable load distribution max. 50% of the lifting load each rack

(**) Duration $t_i < 5\text{min}$. Then $t_p > 30\text{min}$

CE conformity / risk analysis of the entire system is carried out by the customer