

# → SYSTEM-KIT 90000.0002.7553




## Transport of persons and goods in dynamic operation

Lifting load max.	12 kN
Stroke length max. (*)	2.100 mm
Lifting speed appr.	1.400 mm/min.
Engine group (DIN 15020)	1Cm at load collective L3
Useful life (**)	200 h at T1 ( $\leq 0,25$ h daily)
Operating standard	DIN EN 1570-1 / DIN EN 280 + MRL (CE)
Ambient temperature	-5 °C to +60°C
Input speed	max. 200 U/min.
Input torque	appr. 85 Nm



Transport of persons  
In dynamic mode

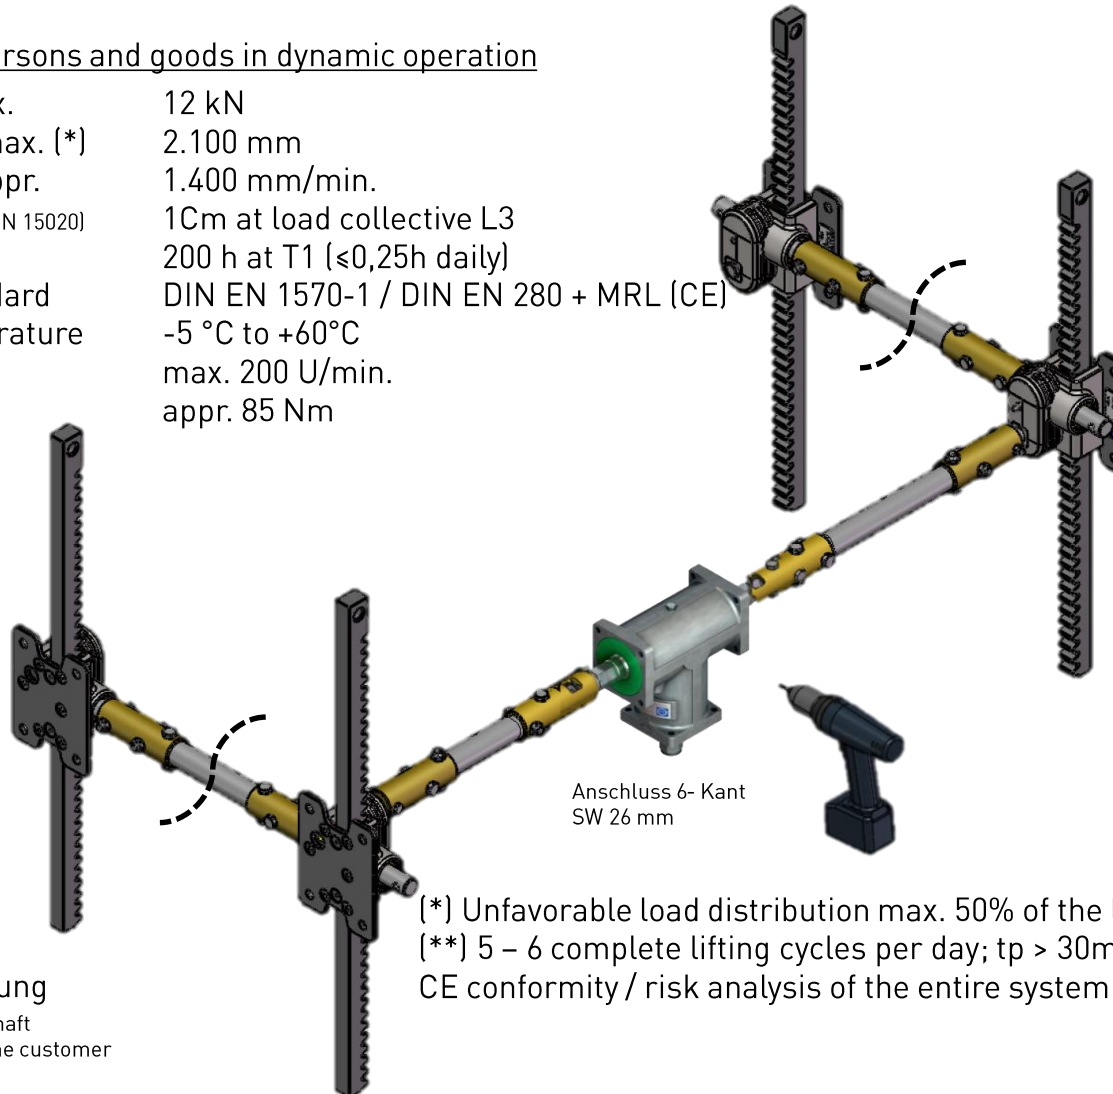

 = Erweiterung  
Connecting shaft  
provided by the customer

(\*) Unfavorable load distribution max. 50% of the lifting load each rack  
(\*\*) 5 – 6 complete lifting cycles per day;  $t_p > 30$ min  
CE conformity / risk analysis of the entire system is carried out by the customer