

→ SYSTEM-KIT 90000.0002.7733




Transport of persons and goods in dynamic operation

Lifting load max.	15 kN
Stroke length max. (*)	2.100 mm
Lifting speed appr.	700 mm/min.
Engine group (DIN 15020)	1Cm at load collective L3
Useful life (**)	400 h at T1 ($\leq 0,25$ h daily)
Operating standard	DIN EN 1570-1 / DIN EN 280 + MRL (CE)
Ambient temperature	-5°C to +60°C
Input speed max.	200rpm.
Input torque approx.	50Nm



Transport of persons
In dynamic mode

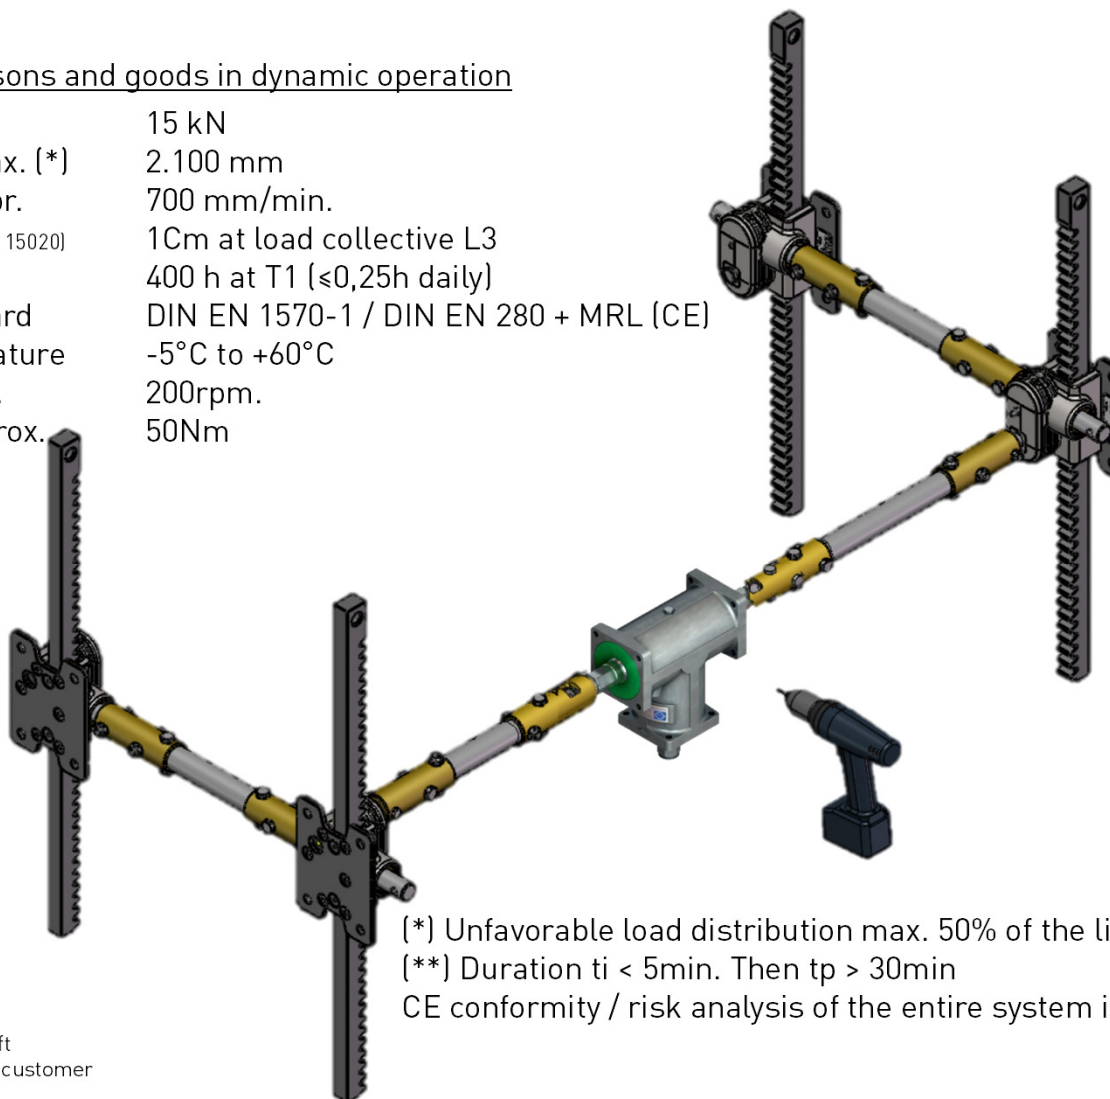

Connecting shaft
provided by the customer

(*) Unfavorable load distribution max. 50% of the lifting load each rack

(**) Duration $t_i < 5$ min. Then $t_p > 30$ min

CE conformity / risk analysis of the entire system is carried out by the customer